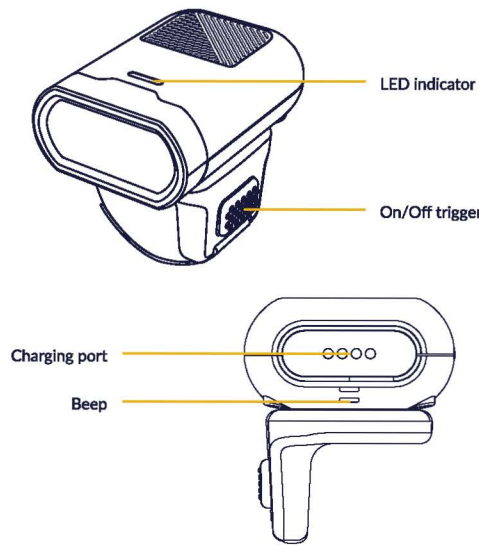


WD4-BS20 is a ring scanner with Bluetooth 5.0 and compatible with mobile phones and tablets.



LED indicator

LED off: off/sleep mode

Red LED on: charging

Green LED on: full battery

Red LED flashes slowly: battery less than 10%

Blue LED on: battery is more than 10% and Bluetooth connected

Blue LED flashes: battery is more than 10% and Bluetooth disconnected

*** When connecting USB cable, battery related LED has the priority to show and when disconnecting USB cable, Bluetooth related LED has the priority to show.*

- 1 Long press on/off button for 3 seconds to power on
- 2 WD4-BS20 will auto sleep without operating for 1 minute in manual decoding mode
- 3 Long press on/off button for 8 seconds to force power off

Scan the Enter setup before barcode setting and scan the Exit setup after barcode setting.

1 Enter/Exit setup



Enter setup



Exit setup

2 Good read beep



On



Off

3 Good read vibration



On



Off

4 Bluetooth mode



Bluetooth HID mode



Bluetooth BLE mode

5 Clear Bluetooth pairing





Clear Bluetooth pairing

Clear Bluetooth pairing information
before change to other host


6 Terminating character suffix



Enable terminating character suffix

Set terminating character to CR
(carriage return)

Enable terminating character to CRLF (0x0D, 0x0A)

Set terminating character to CR
(carriage return)

7 Factory defaults



Restore all factory defaults

WD4-BS20

Name: WD4 Ring Scanner

Manufacturer: Newland EMEA

All technical information are subject to the actual
performance, Newland reserve the right of final
explanations.Newland Europe BV
Rolweg 25
4104 AV Culemborg
The NetherlandsFor more information, please visit
www.newland-id.comWD4
Ring Scanner